


Saldatori serie E

04800-04808

Impugnatura normale (N) e con rapido (C/R) "Serie E".

Poignée normale (N) et avec manette pour le passage rapide du gaz (C/R) "Serie E".

Normal handle (N) and with quick-lever (C/R) "Serie E".

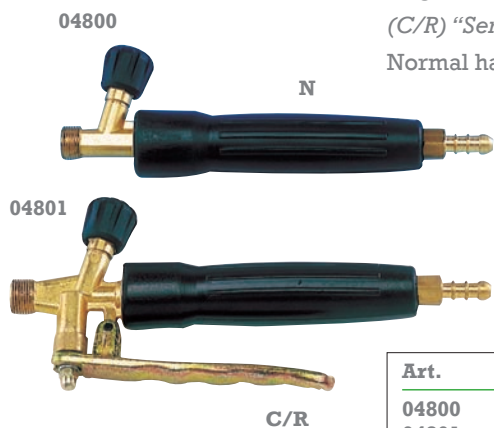

Art.	L mm	Entrata - Entrée - Inlet	Uscita - Sortie - Outlet
04800	N	PG Ø 10	G 3/8 LH
04801	C/R	PG Ø 10	G 3/8 LH
04808	C/R	G 3/8 LH	G 3/8 LH

04829-04833

Torce "Serie E".

Torches "Serie E".

Torches "Serie E".




Art.	Ø mm	Ø I mm	Qn/G31: 1 bar			A
			kW	g/h	Cal/h	
04829	22	0,35	2,4	173	2050	M10x1
04830	30	0,52	5,3	382	4530	M10x1
04831	40	0,70	9,5	693	8200	M10x1
04832	50	0,90	15,8	1145	13570	M10x1
04833	60	1,45	41	2970	35210	M10x1

04850-04860

Tubi prolunga curvi "Serie E".

Tube rallonges courbés "Serie E".

Bented extension tubes "Serie E".

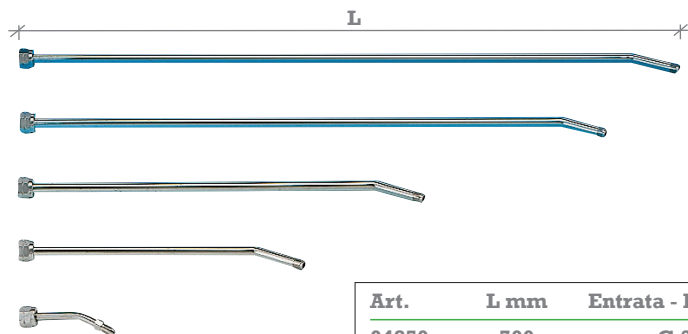

Art.	L mm	Entrata - Entrée - Inlet	Uscita - Sortie - Outlet
04850	700	G 3/8 LH	M10x1
04853	600	G 3/8 LH	M10x1
04855	400	G 3/8 LH	M10x1
04857	270	G 3/8 LH	M10x1
04860	100	G 3/8 LH	M10x1